C.E. S-108

Note:
All spike holes in plates to be 3/4"x3/4" unless otherwise shown.
All plates to be stamped as shown.
2 Required of each plate Number.









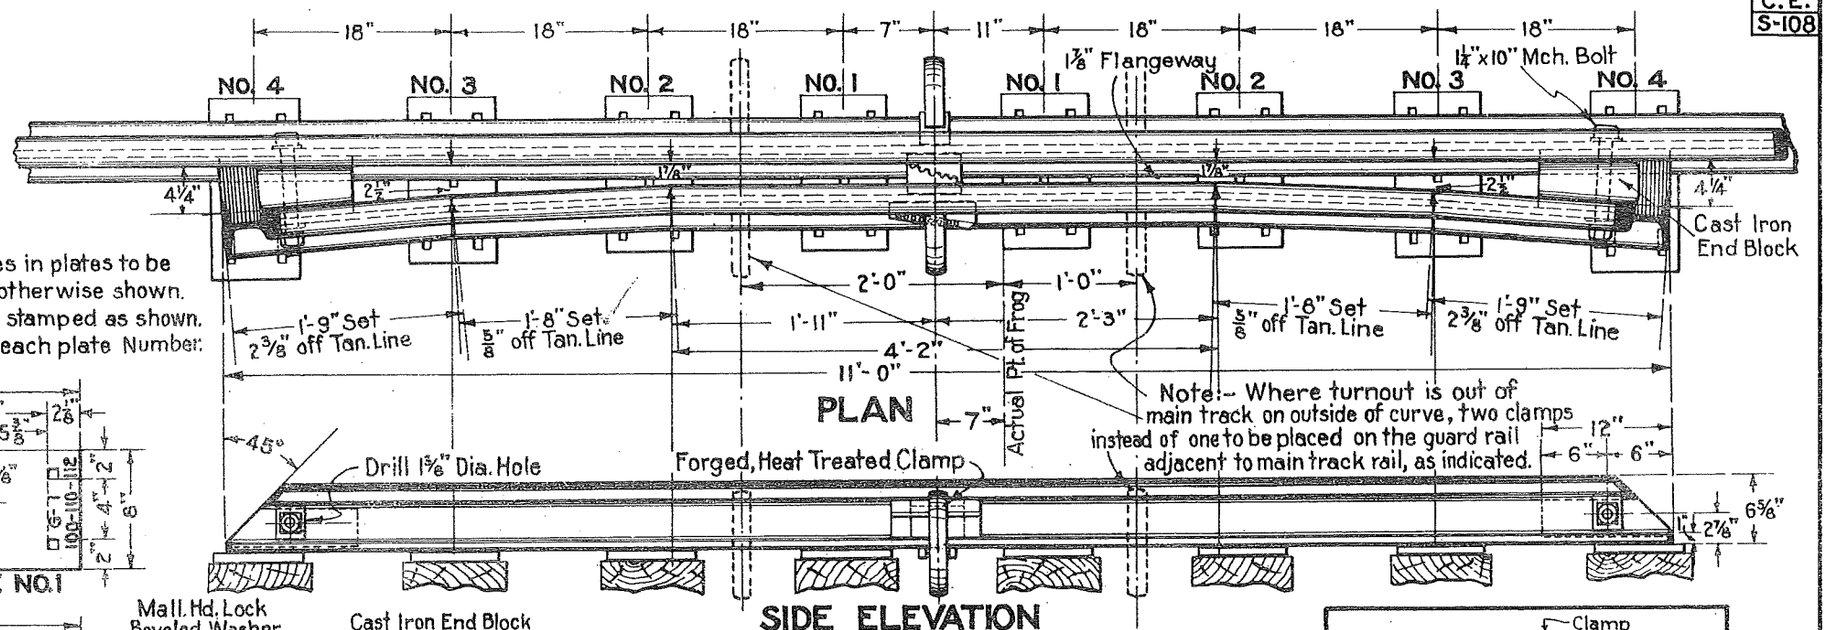

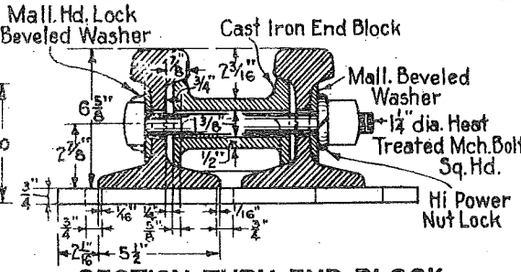



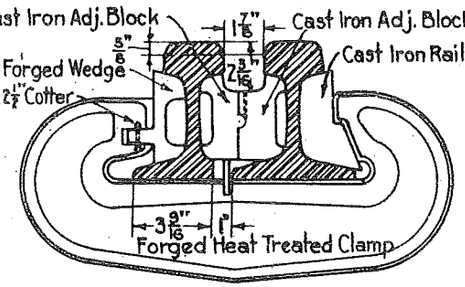

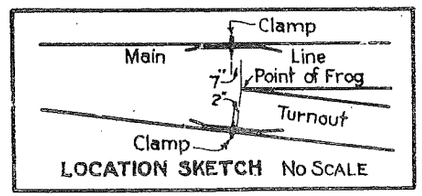

Specifications:- As per A.R.E.A. Specifications, Appendix A, adopted March, 1934.
Plan 505 for guard railsclamps, adopted Mar. 1934.

NOTE:- The distance from gage line at frog point to inside face of guard rail must always be maintained at 4'-6 5/8". If gage of track is more than 4'-8 1/2", the guard rail flangeway must be more than 1 7/8" by the same amount.

APPROVED: J. W. Williams
CHIEF ENGINEER

APPROVED: E. W. Mason
VICE PRESIDENT AND GENERAL MANAGER

THE WESTERN PACIFIC RAILROAD CO.

STANDARD

11FT - 112LB. GUARD RAIL

SCALES AS NOTED

ADOPTED MARCH, 1935
REVISED NOV. 1, 1935
" MAR. 2, 1936